




Luxurious Bathing Now At Home With Fleck Water Softeners

Extensive R&D combined with
the latest american technology
to find the perfect solution
to bring you the best feel
of water for your homes.

**1 year on electronic components, 3 years on mechanical components

A Unit Of R.K Distributors

ADVANTAGES



SOFTER FEEL OF HAIR AND
REDUCED HAIR FALL



ASSURED SOFTER
FEEL OF SKIN



NO SCALING ON TAPS/
SHOWER HEAD/FLOORING



SIGNIFICANTLY BETTER
LATHER, LESSER
CONSUMPTION OF SOAP

FEATURES



AUTOMATIC REGENERATION AS PER TIME AND FLOW SETTING



SIMPLE USER INTERFACE FOR CONSTANT MONITORING & AUXILIARY SWITCH PROVISION



CORROSION RESISTANT VALVE AND TANK BODY FOR LONG LIFE



NSF-44 CERTIFIED FOR WATER SOFTENER PERFORMANCE



PISTON OPERATED VALVES FOR HIGH PRESSURE OPERATION



HARD WATER BYPASS FOR UNINTERRUPTED WATER SUPPLY EVEN DURING MAINTENANCE



INCLUDES A PENTAIR PRE FILTER WITH BYPASS FOR MICRON FILTRATION



TANKS AVAILABLE IN BLUE AND ALMOND COLOUR

MODELS

MODEL NUMBER	PW-AUTOSOFT 2162	PW-AUTOSOFT 1665	PW-AUTOSOFT 1354
Model Description	2162 TANK W/5810SXT SOFTENING SYSTEM	1665 TANK W/5800SXT SOFTENING SYSTEM	1354 TANK W/5600SXT SOFTENING SYSTEM
Resin Volume (Ltrs)	250	150	75
Service Flow Rate (m3/hr)	8	5	2.5
Regeneration Type	Downflow	Downflow	Downflow
Brine Tank Capacity (Ltrs)	200	200	100
Operating Pressure (Bar)	2-8	2-6	2-6
Regeneration Mode	Time & Flow Based	Time & Flow Based	Time & Flow Based
Softened Water Output(m3/hr) @400ppm hardness	35	21	11

THE ABOVE SYSTEMS CAN BE CONVERTED INTO SAND, CARBON AND IRON FILTRATION SYSTEMS


Note

1. Flow Rate of each system is a function of velocity, for softeners we ideally recommend a velocity >17m/s
2. The softened water post treatment will be less than 50ppm and the resin would function upto a hardness of 900ppm



IDEAL INSTALLATION LOCATIONS

SUMP TO OHT

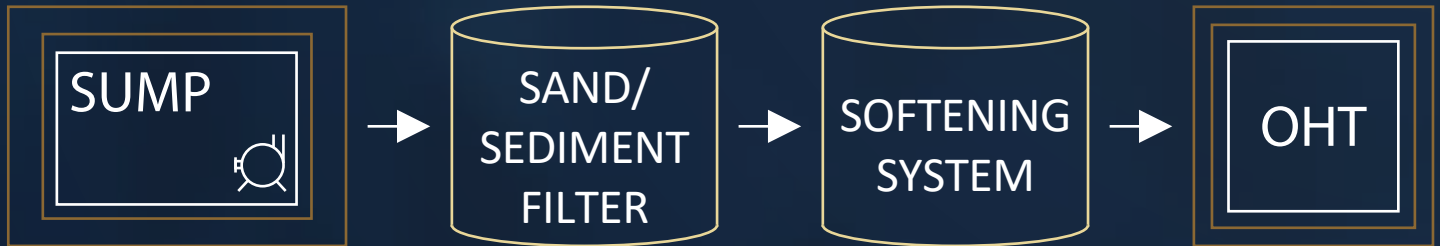

OHT DELIVERY LINE

